



FRONT VIEW

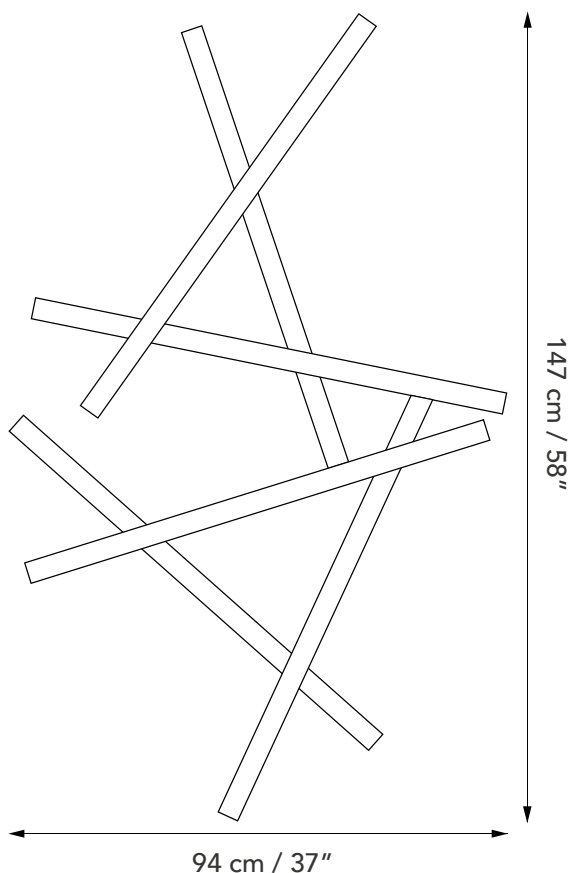

SIDE VIEW

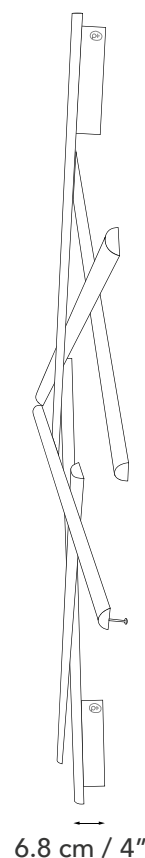

PICK-UP-STICKS

SCONCE

CHARACTERISTICS

MATERIALS:
Brass

WATTAGE:
60 W

ELECTRICAL CLASS:
Class 1

METAL FINISH:
Polished, Burnished, Blackened

LUMENS:
3100 lm

OPERATING TEMPERATURE:
-30 ~ +70°C

DIMENSIONS:
147 cm x 94 cm x 7 cm
58" x 37" x 3"

COLOR TEMP:
2700 K

CERTIFICAT:
CE

WEIGHT:
3.7 kg

IRC :
>90

SHIPPING DIMENSIONS:
150 cm x 105 cm x 15 cm

ILLUMINATION:
Integrated LED strip

LAMP LIFE:
30,000 heures


SHIPPING WEIGHT:
32 kg

INPUT:
110-240 V

INGRESS PROTECTION:
IP 20

OUTPUT:
Integrated 24V-DC


FREQUENCY:
50 - 60 Hz




PICK-UP-STICKS

SCONCE


IN THE BOX

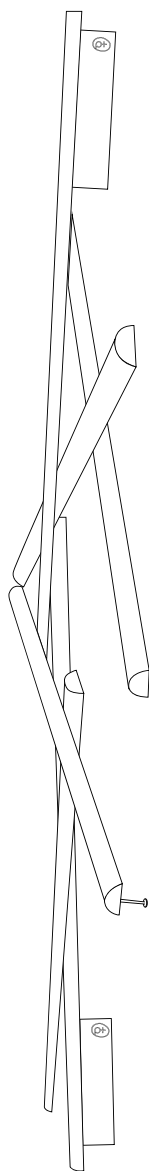

2 WALL BRACKET

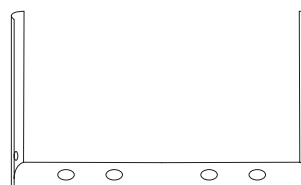


8 SCREWS WITH ANCHORS



4 CANOPY SCREWS



DIMMER AND TRANSFORMER



4 WAGOS



SAFETY INSTRUCTIONS

Only suitable for direct mounting on non-combustible surfaces.

Suitable for dry indoor use only.

We strongly recommend that a professional electrician install all direct wired fixtures.

Make sure the electricity is off during installation.

WALL MOUNTING

1. Secure the wall bracket (B) to the wall with the 4 screws (A); depending on the material of the wall use the anchors (C).
2. Unscrew the screws from the base (F).
3. Remove the power transformer (G) and the dimmer (H) from the base.
4. Connect the power source (D) from the junction box (K) to the lead wires of the transformer using the Wagos provided (E).
5. Connect the dimmer switch wires (I) to the dimmer (H).
6. Connect the ground wire (J) to that of the junction box (K).
7. Replace the transformer and dimmer in the base.
8. Place the back of the lamp in the support and affix it with the canopy screws (F).
9. Optional: The lamp is compatible with a radio frequency remote control. A remote control is not included.

