

GOLDEN EGG – SMALL

SCONCE

CHARACTERISTICS

MATERIALS:  
Brass

METAL FINISH:  
Polished, Burnished, Blackened

DIMENSIONS:  
40 cm x 25 cm x 14 cm  
15.7" x 9.8" x 5.5"

WEIGHT:  
1.7 kg

ILLUMINATION:  
Integrated LED strip

INPUT:  
110-240 V

OUTPUT:  
Integrated 24V-DC

WATTAGE:  
9 W

LUMENS:  
600 lm

COLOR TEMP:  
2700 K

IRC :  
>90

LAMP LIFE:  
30,000 heures

PROTECTION SIGN:  
IP 20

FREQUENCY:  
50 - 60 Hz

ELECTRICAL CLASS:  
Class 1

OPERATING TEMPERATURE:  
-30 - +70°C


CERTIFICAT:  
CE

SHIPPING DIMENSIONS:  
59 cm x 39 cm x 20 cm


SHIPPING WEIGHT:  
2.4 kg




IN THE BOX

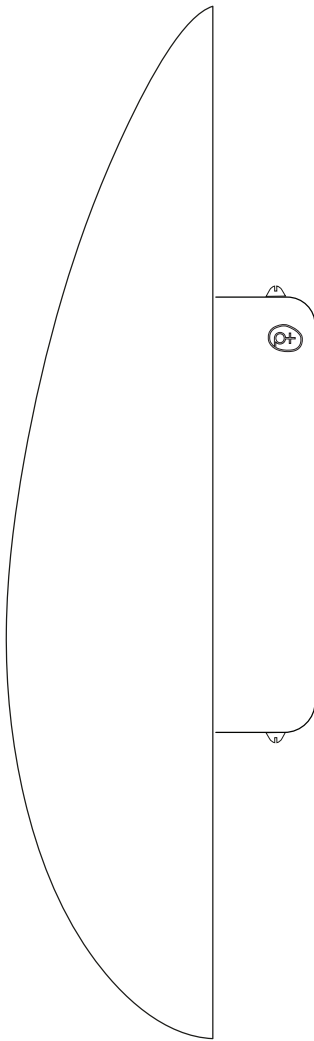

1 WALL BRACKET

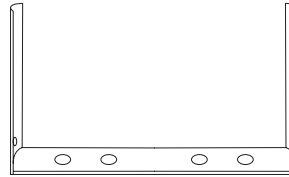


4 SCREWS WITH ANCHORS



2 CANOPY SCREWS



DIMMER AND TRANSFORMER



4 WAGOS



SAFETY INSTRUCTIONS

Only suitable for direct mounting on non-combustible surfaces.

Suitable for dry indoor use only.

We strongly recommend that a professional electrician install all direct wired fixtures.

Make sure the electricity is off during installation.

WALL MOUNTING

1. Secure the wall bracket (B) to the wall with the 4 screws (A); depending on the material of the wall use the anchors (C).
2. Unscrew the screws from the base (F).
3. Remove the power transformer (G) and the dimmer (H) from the base.
4. Connect the power source (D) from the junction box to the lead wires of the transformer using the Wagos provided (E).
5. Connect the push switch wires (I) to the dimmer.
6. Connect the ground wire (J) to that of the junction box (K).
7. Replace the transformer and dimmer in the base.
8. Place the back of the bracket on the support before fixing it with the screws (F).
9. Secure the bracket to its support with the screws.
10. Optional: The lamp is compatible with a radio frequency remote control. A remote control is not included.

